

RIVQUICK® Varibulb high strength blind rivets

Dome head

Note: steel body and steel mandrel

Technical information can be found on the last page.




Diameter (d)	Article number	d ₁ nominal size	d ₂ nominal size	Drilling diameter d nominal size	e	
					min.	max.
3.2	22182332070	3.2	6.5	3.3 - 3.4	1.0	3.0
	22182332090		6.5	3.3 - 3.4	3.0	5.0
	22182332110		6.5	3.3 - 3.4	5.0	7.0
4	22182340070	4	8	4.1 - 4.2	1.0	3.0
	22182340090		8	4.1 - 4.2	3.0	5.0
	22182340120		8	4.1 - 4.2	5.0	7.0
4.8	22382148121	4.8	9.5	5.0 - 5.2	1.5	3.5
	22382148146		9.5	5.0 - 5.2	3.5	5.5
6.4	22082364130	6.4	13.4	6.6	1.5	5.5
	22082364165		13.4	6.6	5.0	9.0
	22382364170		13	6.6 - 7.0	2.0	6.0
	22382364200		13	6.6 - 7.0	5.0	9.0

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
3.2	11.0	0.9	2400	1250
	13.0	0.9	2400	1250
	15.0	0.9	2400	1250
4	11.0	1.2	3400	2100
	13.0	1.2	3400	2100
	16.0	1.2	3400	2100
4.8	12.1	1.4	3300 - 3600	3800
	14.6	1.4	3300 - 4200	3800
6.4	13.0	3.1	9990	6120
	16.5	3.1	9990	6120
	17.0	2.0	5000 - 10000	7000
	20.0	2.0	5000 - 10000	7000

All technical data refer to the measure mm



Symbol list

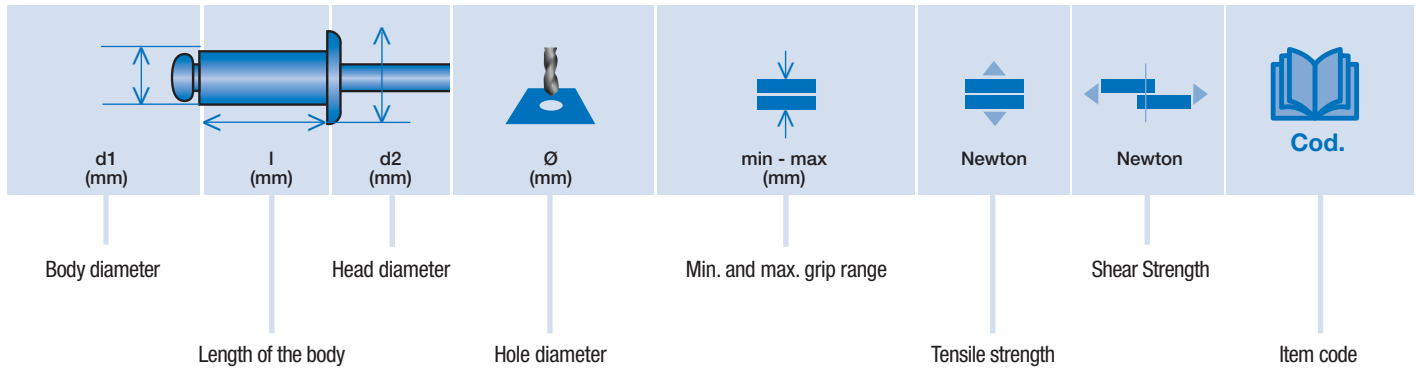

All technical data refer to the measure mm

